### SCS240KE2HR

#### **Automotive Grade SiC Schottky Barrier Diode**

Datasheet

$V_R$	1200V
I <sub>F</sub>	20A/40A*
Q <sub>C</sub>	66nC(Per leg)


(\*Per leg/ Both legs)

# Outline TO-247N (1) (2) (3)

#### Features

- 1) AEC-Q101 qualified
- 2) Low forward voltage
- 3) Negligible recovery time/current
- 4) Temperature independent switching behavior

## ●Inner circuit

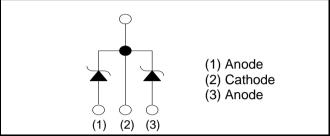

#### Applications

- On Board Charger
- DC/DC Converter
- · Wireless Charger
- EV Charger

Packaging specifications

_					
		Packaging	Tube		
		Reel size (mm)	-		
	Type	Tape width (mm)	-		
	Type	Basic ordering unit (pcs)	30		
		Packing code	C11		
		Marking	SCS240KE2		

#### ● Absolute maximum ratings (T<sub>i</sub> = 25°C)

Parameter		Symbol	Value	Unit
Reverse voltage (re	petitive peak)	$V_{RM}$	1200	V
Reverse voltage (De	C)	$V_R$	1200	V
Continuous forward	current *3 (T <sub>c</sub> = 134°C)	I <sub>F</sub>	20/40	А
Surge non-	PW=10ms sinusoidal, T <sub>j</sub> =25°C		78/150	А
repetitive forward current *3	PW=10ms sinusoidal, T <sub>j</sub> =150°C	I <sub>FSM</sub>	59/110	А
	PW=10μs square, T <sub>j</sub> =25°C		310/620	А
Repetitive peak forward current*3		I <sub>FRM</sub>	83/160 <sup>*1</sup>	А
PW=10ms, T <sub>j</sub> =25°C		۲.2 n	31/120	A <sup>2</sup> s
i <sup>2</sup> t value <sup>*3</sup> PW=10ms, T <sub>j</sub> =150°C		$\int i^2 dt$	17/69	A <sup>2</sup> s
Total power dissipation *3		$P_D$	210/420*2	W
Junction temperature		T <sub>j</sub>	175	°C
Range of storage temperature		$T_{stg}$	-55 to +175	°C

<sup>\*1</sup> T<sub>c</sub>=100°C, T<sub>i</sub>=150°C, Duty cycle=10% \*2 T<sub>c</sub>=25°C \*3 Per leg/ Both legs

#### ●Electrical characteristics (T<sub>j</sub> = 25°C) (Per Leg)

Parameter	Symbol	ymbol Conditions -	Values			Unit
Parameter .	Symbol		Min.	Тур.	Max.	Unit
DC blocking voltage	$V_{DC}$	I <sub>R</sub> =0.4mA	1200	-	-	V
	V <sub>F</sub>	I <sub>F</sub> =20A,T <sub>j</sub> =25°C	-	1.4	1.6	V
Forward voltage		I <sub>F</sub> =20A,T <sub>j</sub> =150°C	-	1.8	-	V
		I <sub>F</sub> =20A,T <sub>j</sub> =175°C	-	1.9	-	V
Reverse current	I <sub>R</sub>	V <sub>R</sub> =1200V,T <sub>j</sub> =25°C	-	20	400	μΑ
		V <sub>R</sub> =1200V,T <sub>j</sub> =150°C	-	160	-	μΑ
		V <sub>R</sub> =1200V,T <sub>j</sub> =175°C	-	260	-	μΑ
Total capacitance	С	V <sub>R</sub> =1V,f=1MHz	-	1050	-	pF
		V <sub>R</sub> =600V,f=1MHz	-	85	-	pF
Total capacitive charge	Q <sub>C</sub>	V <sub>R</sub> =800V,di/dt=500A/μs	-	66	-	nC
Switching time	t <sub>C</sub>	V <sub>R</sub> =800V,di/dt=500A/μs	-	18	-	ns


#### Thermal characteristics

Parameter	Symbol	Conditions	Values			Unit
			Min.	Тур.	Max.	Offic
Thermal resistance	D	Per Leg	-	0.56	0.70	°C/W
	$R_{th(j-c)}$	Both Legs	-	0.28	0.35	°C/W

#### ●Typical Transient Thermal Characteristics (Per Leg)

Symbol	Value	Unit
R <sub>th1</sub>	1.57×10 <sup>-1</sup>	
R <sub>th2</sub>	2.46×10 <sup>-1</sup>	K/W
R <sub>th3</sub>	1.57×10 <sup>-1</sup>	

Symbol	Value	Unit
$C_{th1}$	5.03×10 <sup>-3</sup>	
C <sub>th2</sub>	6.74×10 <sup>-3</sup>	Ws/K
C <sub>th3</sub>	6.11×10 <sup>-2</sup>	

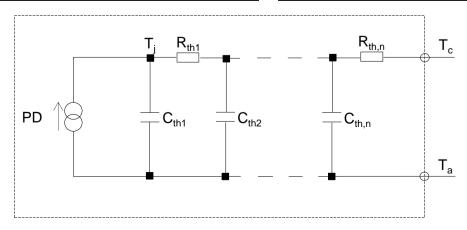

#### •Electrical characteristic curves

Fig.1 V<sub>F</sub> - I<sub>F</sub> Characteristics (Per Leg)



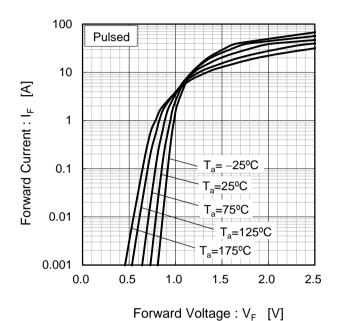


Fig.2 V<sub>F</sub> - I<sub>F</sub> Characteristics (Per Leg)

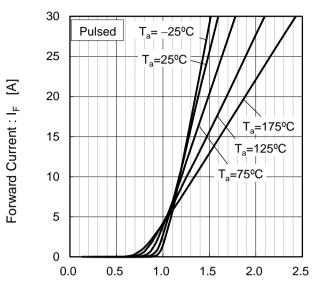


Forward Voltage : V<sub>F</sub> [V]

Fig.3  $V_R$  -  $I_R$  Characteristics (Per Leg)

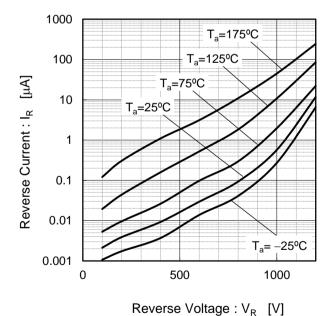

toroico ronago: v<sub>R</sub> [v]

Fig.4 V<sub>R</sub> - C<sub>t</sub> Characteristics (Per Leg)

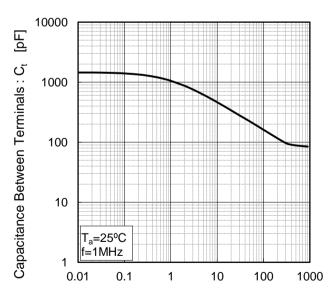

Reverse Voltage: V<sub>R</sub> [V]

#### Electrical characteristic curves



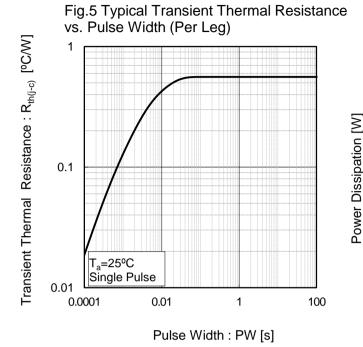


Fig.6 Power Dissipation (Per Leg)

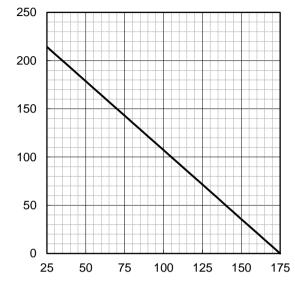

Case Temperature : T<sub>c</sub> [°C]

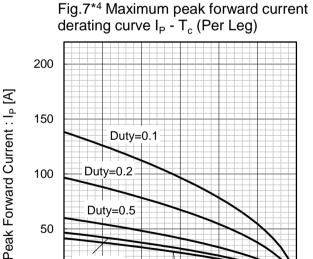

125

150


175

Case Temperature : T<sub>c</sub> [°C] \*4 Based on max Vf, max R<sub>th(j-c)</sub> Valid for switching of above 10kHz, excluding D.C. curve.

D.C.

100

Fig.8\*5 Typical peak forward current derating curve I<sub>P</sub> - T<sub>c</sub> (Per Leg, Not guaranteed)

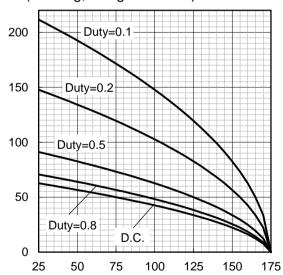

Case Temperature : T<sub>c</sub> [°C] \*5 Based on typ Vf, typ R<sub>th(j-c)</sub> Typical value, not guaranteed Valid for switching of above 10kHz, excluding D.C. curve

50

0

25


Duty=0.8

50

75

Peak Forward Current : Ip [A]

#### •Electrical characteristic curves




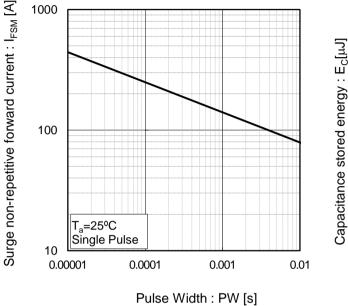



Fig.10 Typical capacitance store energy (Per Leg)

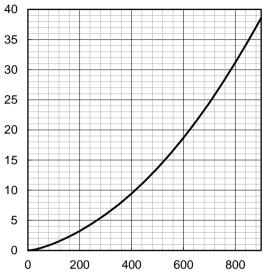

Reverse Voltage: V<sub>R</sub> [V]

#### Symplified forward characteristic model (Per Leg)

Fig.11 Equivalent forward current curve

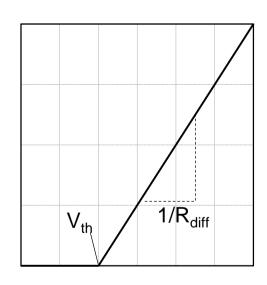

Forward Voltage :  $V_{\rm F}$ 

$$V_F = V_{th} + R_{diff} I_F$$

$$V_{th} (T_j) = a_0 + a_1 T_j$$
  
 $R_{diff} (T_j) = b_0 + b_1 T_j + b_2 T_j^2$ 

Symbol	Typical Value	Unit
$a_0$	9.93×10 <sup>-1</sup>	V
a <sub>1</sub>	-1.27×10 <sup>-3</sup>	V/°C
b <sub>0</sub>	1.83×10 <sup>-2</sup>	Ω
b <sub>1</sub>	1.03×10 <sup>-4</sup>	Ω/°C
b <sub>2</sub>	6.65×10 <sup>-7</sup>	Ω/°C <sup>2</sup>

 $T_i$  in °C; -55 °C <  $T_i$  < 175°C;  $I_F$  < 40 A

Forward Current: IF

#### Notes

- 1) The information contained herein is subject to change without notice.
- Before you use our Products, please contact our sales representative and verify the latest specifications:
- 3) Although ROHM is continuously working to improve product reliability and quality, semiconductors can break down and malfunction due to various factors. Therefore, in order to prevent personal injury or fire arising from failure, please take safety measures such as complying with the derating characteristics, implementing redundant and fire prevention designs, and utilizing backups and fail-safe procedures. ROHM shall have no responsibility for any damages arising out of the use of our Poducts beyond the rating specified by ROHM.
- 4) Examples of application circuits, circuit constants and any other information contained herein are provided only to illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.
- 5) The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM or any other parties. ROHM shall have no responsibility whatsoever for any dispute arising out of the use of such technical information.
- 6) The Products specified in this document are not designed to be radiation tolerant.
- 7) For use of our Products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a ROHM representative: transportation equipment (i.e. cars, ships, trains), primary communication equipment, traffic lights, fire/crime prevention, safety equipment, medical systems, and power transmission systems.
- 8) Do not use our Products in applications requiring extremely high reliability, such as aerospace equipment, nuclear power control systems, and submarine repeaters.
- 9) ROHM shall have no responsibility for any damages or injury arising from non-compliance with the recommended usage conditions and specifications contained herein.
- 10) ROHM has used reasonable care to ensur the accuracy of the information contained in this document. However, ROHM does not warrants that such information is error-free, and ROHM shall have no responsibility for any damages arising from any inaccuracy or misprint of such information.
- 11) Please use the Products in accordance with any applicable environmental laws and regulations, such as the RoHS Directive. For more details, including RoHS compatibility, please contact a ROHM sales office. ROHM shall have no responsibility for any damages or losses resulting non-compliance with any applicable laws or regulations.
- 12) When providing our Products and technologies contained in this document to other countries, you must abide by the procedures and provisions stipulated in all applicable export laws and regulations, including without limitation the US Export Administration Regulations and the Foreign Exchange and Foreign Trade Act.
- 13) This document, in part or in whole, may not be reprinted or reproduced without prior consent of ROHM.



Thank you for your accessing to ROHM product informations.

More detail product informations and catalogs are available, please contact us.

#### ROHM Customer Support System

http://www.rohm.com/contact/