



EL CONNECTOR

Disconnectable Crimp style Wire-to-wire connectors

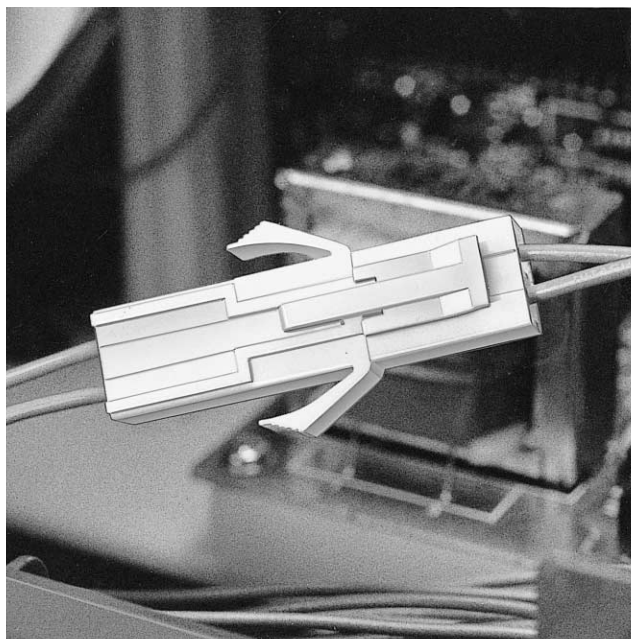

The contacts for the compact EL connector can be easily inserted into the connector housings. The plug housing and the receptacle housing can be smoothly mated even if they are mechanically distorted.

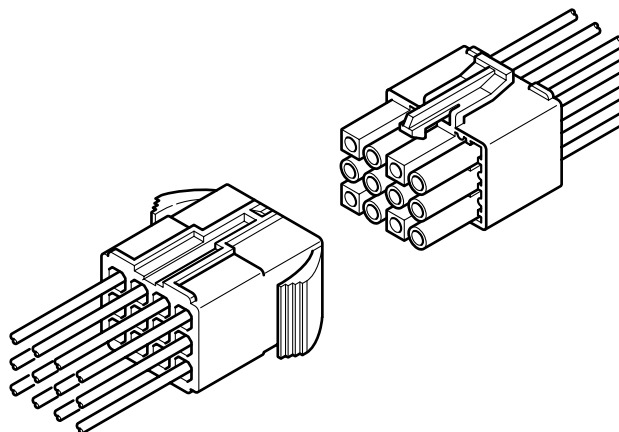

Features

- Easy insertion and secure installation of contacts**
 Each contact has a pair of locking lances so that the contact can be installed and symmetrically locked in the housing. A lance retraction prevention mechanism is also provided so that the contact will be securely held in the housing. The lances have sufficient clearance to allow the contacts to be easily inserted into the housing.
- A smooth connection even when pried during mating**
 The contact is held by the housing along a wide surface area. This reduces the deflection of the contact and ensures a smooth, safe connection even when pried during mating.
- Durable arm lock mechanism**
 The arm lock mechanism of the housing is slit to prevent stress concentration during connection. Thus, it is highly durable and will survive repeated matings.
- Two contact styles**
 Two different kinds of crimp contacts are available for convenient branching or internal jumpering.

Specifications

- Current rating: 10A AC, DC max.
 - Voltage rating: 300V AC, DC max.
 - Temperature range: -25°C to +90°C
(including temperature rise in applying electrical current)
 - Contact resistance: Initial value/7m Ω max.
After environmental testing/10m Ω max.
 - Insulation resistance: 1,000M Ω min.
 - Withstanding voltage: 1,500V AC/minute
 - Applicable wire: AWG #26 to #16
0.13 to 1.25mm²
 - Applicable panel thickness: 0.8 to 2.0mm(.031" to .079")
- * Contact JST if Lead-Free product is required.
 * Refer to "General Instruction and Notice when using Terminals and Connectors" at the end of this catalog.
 * Contact JST for details.

Note: The current rating varies depending on the number of circuits and the wire size used in each connector. The table below lists the current rating as a function of the number of circuits and the wire size.

Current unit: A

Circuits	Wire size (AWG)					
	#16	#18	#20	#22	#24	#26
2	10	6	5	4	4	3
3	10	6	5	4	4	3
4	10	6	5	4	4	3
6	8	5	4	3	3	3
9	6	4	3	3	2	2
12	6	4	3	3	2	2
15	6	4	3	3	2	2


Standards

- Recognized E60389
- Certified LR20812
- R75052

Approved according to DIN EN61984<NO.40013305>

- Current rating: 6A, 5A, 4A, 3A
- Voltage rating: AC 250V, DC 300V
- Kind of protection: IP 00
- Applicable wires: AWG 18-26

Contact

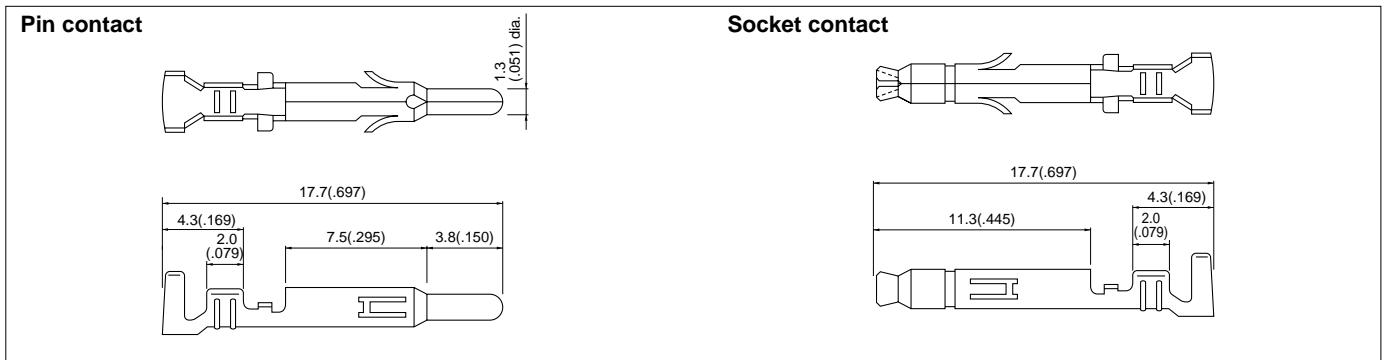

Model No.		Applicable wire			Q'ty / reel
Pin contact	Socket contact	mm ²	AWG #	Insulation O.D. mm(in.)	
SLM-01T-P1.3E	SLF-01T-P1.3E	0.13 to 0.5	26 to 20	1.3 to 2.7 (.051 to .106)	6,000
SLM-41T-P1.3E	SLF-41T-P1.3E	0.5 to 1.25	20 to 16	1.9 to 3.4 (.075 to .134)	4,000
*SLM-42T-P1.3E	*SLF-42T-P1.3E	0.3+0.3 to 0.5+0.5	22+22 to 20+20	1.7+1.7 to 2.0+2.0 (.067+.067 to .079+.079)	

Material and Finish

Phosphor bronze, tin-plated

- Note: 1. Contact denoted by * is used for two wires.
 2. Contact JST for special products.
 3. Contact JST for brass products.

Housing








Material: Nylon 6, UL94V-0, white

Circuits	Voltage rating	Current rating	Receptacle housing(for pin contact)		Plug housing(for socket contact)	
			Model No.	Q'ty / bag	Model No.	Q'ty / bag
2	300V	10A	ELR-02V 	500	ELP-02V 	500
			ELR-02VF 	500		
3	300V	10A	ELR-03V 	500	ELP-03V 	500

EL CONNECTOR

Housing

Material: Nylon 6, UL94V-0, white

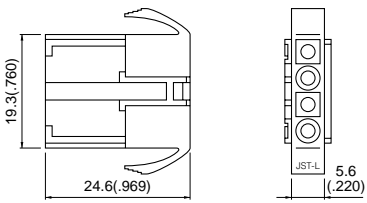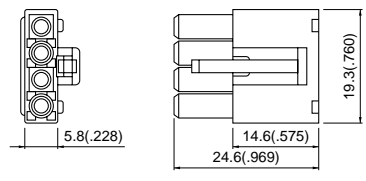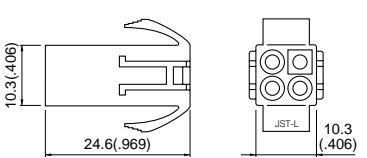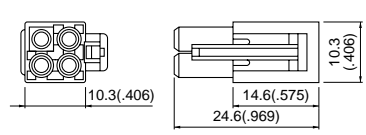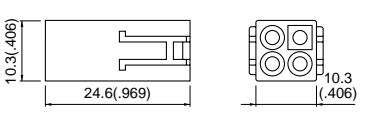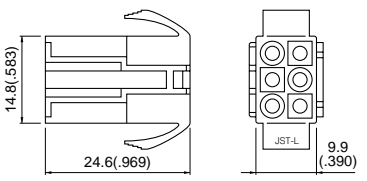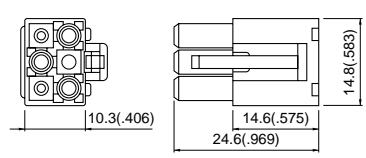Circuits	Voltage rating	Current rating	Receptacle housing(for pin contact)		Plug housing(for socket contact)	
			Part No.	Q'ty / bag	Part No.	Q'ty / bag
4	300V	10A	ELR-04V 	500	ELP-04V 	500
			ELR-04NV 	500	ELP-04NV 	500
			ELR-04NVF 			
6	300V	8A	ELR-06V 	500	ELP-06V 	500

Housing

Material: Nylon 6, UL94V-0, white




Circuits	Voltage rating	Current rating	Receptacle housing(for pin contact)		Plug housing(for socket contact)	
			ELR-09V	Q'ty / bag	ELP-09V	Q'ty / bag
9	300V	6A		500		500
12	300V	6A		500		500
15	300V	6A		500		500

Note:


1. ELR-02VF and ELR-04NVF are exclusively for free hanging. The other circuits can be used either for panel mounted or free hanging. The panel hole dimensions are given on the next page.
2. Contact JST for special products.

EL CONNECTOR

Contact position location numbers

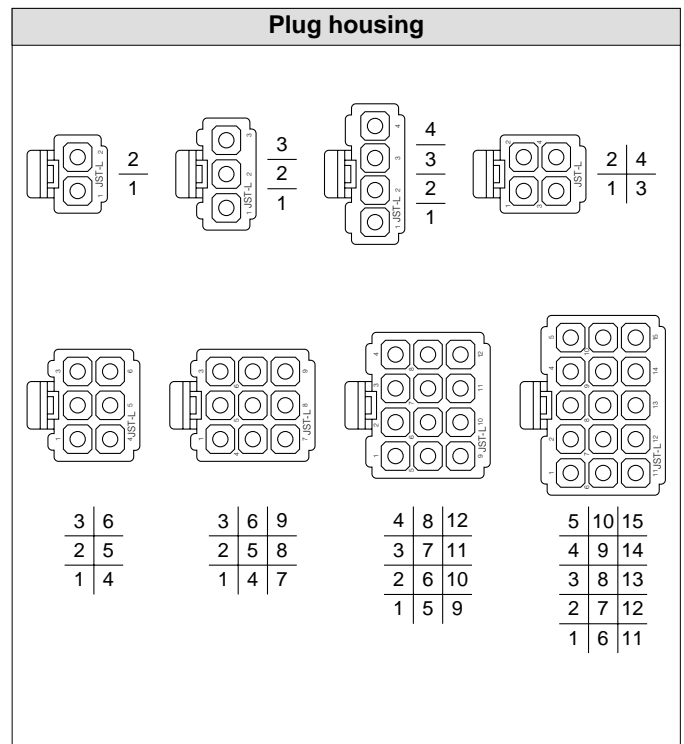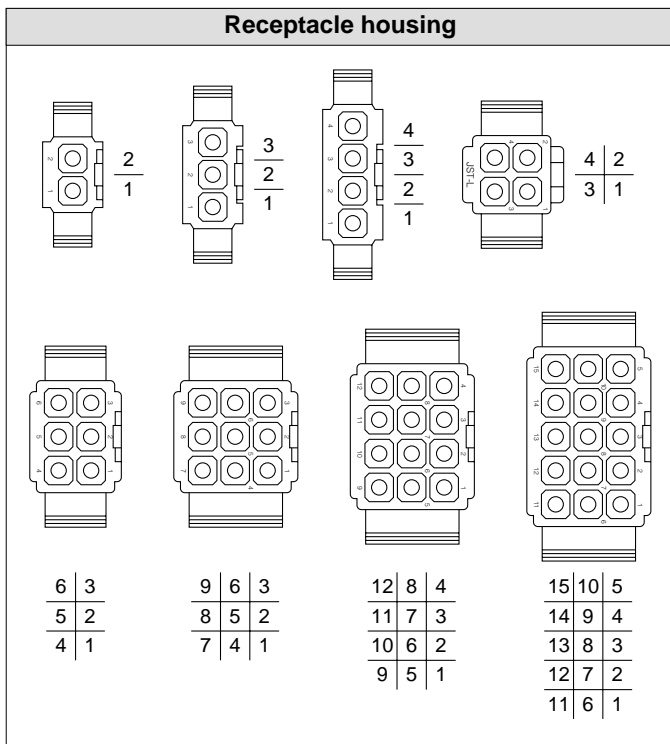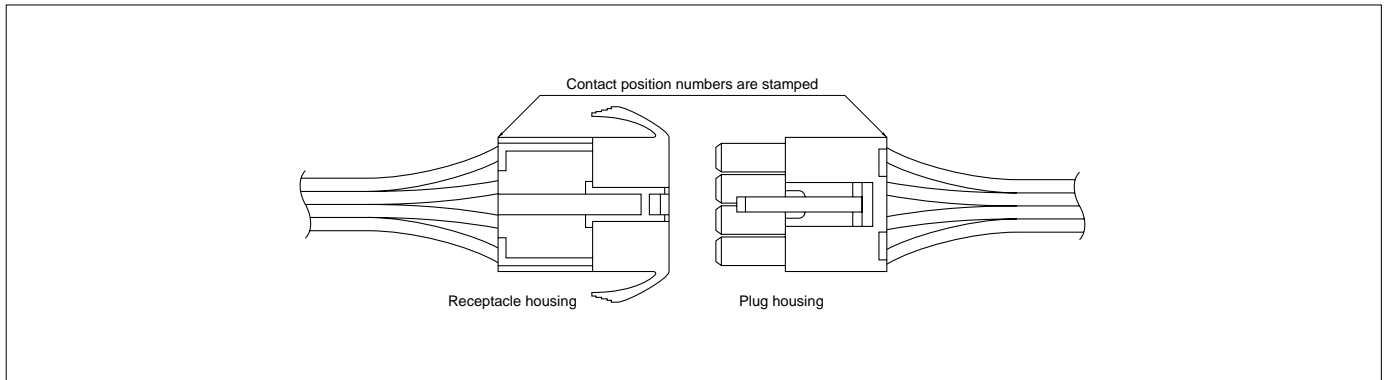

Panel layout

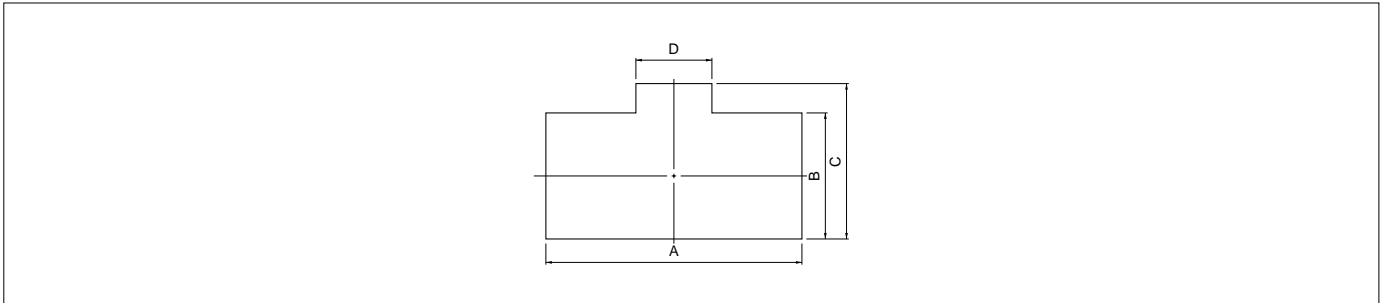


Circuits	Receptacle housing Model No.	Panel hole dimensions mm(in.)				Applicable panel thickness mm(in.)
		A	B	C	D	
2	ELR-02V	15.0(.591)	6.0(.236)	6.85(.270)	5.2(.205)	0.8 to 2.0 (.031 to .079)
3	ELR-03V	19.7(.776)	6.0(.236)	6.85(.270)	5.2(.205)	
4	ELR-04V	24.2(.953)	6.0(.236)	6.85(.270)	5.2(.205)	
	ELR-04NV	15.6(.614)	10.6(.417)	11.6(.457)	5.2(.205)	
6	ELR-06V	19.7(.776)	10.2(.402)	11.1(.437)	5.2(.205)	
9	ELR-09V	19.7(.776)	14.8(.583)	15.7(.618)	5.2(.205)	
12	ELR-12V	24.2(.953)	14.8(.583)	15.7(.618)	5.2(.205)	
15	ELR-15V	28.7(1.130)	14.8(.583)	15.7(.618)	5.2(.205)	

Note:

1. Punch holes in the panel according to the sketch and table shown above. Burrs must be removed.
2. The strength of the panel must be considered when punching two or more holes.
3. The connector must be inserted from the same side as the hole is punched.

Assembly layout

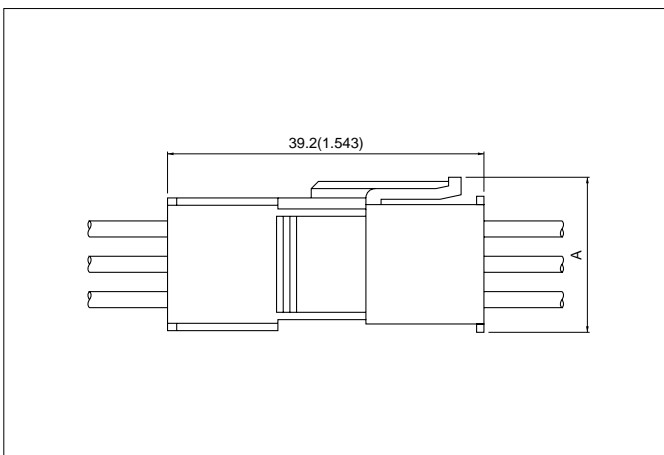

Circuits	Dimensions A mm(in.)
2 to 4 (Single-line arrangement)	10.4(.409)
4 (Double-line arrangement)	15.0(.591)
6	14.9(.587)
9 to 15	19.4(.764)

Applicator for the semi-automatic press AP-K2N

Contact	Crimp applicator MKS-L		Compact Crimp applicator MKS-LS		Strip-crimp applicator MKS-SC
	with safety cover	without safety cover	with safety cover	without safety cover	with safety cover
SLF-01T-P1.3E	APLMK SLF/M01-13E	APLNC SLF/M01-13E	-	-	APLSC SLF/M01-13E
SLM-01T-P1.3E	APLMK SLF/M01-13E	APLNC SLF/M01-13E	-	-	APLSC SLF/M01-13E
SLF-41T-P1.3E	APLMK SLF/M41-13E	APLNC SLF/M41-13E	-	-	APLSC SLF/M41-13E
SLM-41T-P1.3E	APLMK SLF/M41-13E	APLNC SLF/M41-13E	-	-	APLSC SLF/M41-13E
SLF-42T-P1.3E	APLMK SLF/M42-13E	APLNC SLF/M42-13E	-	-	-
SLM-42T-P1.3E	APLMK SLF/M42-13E	APLNC SLF/M42-13E	-	-	-