


Feb.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

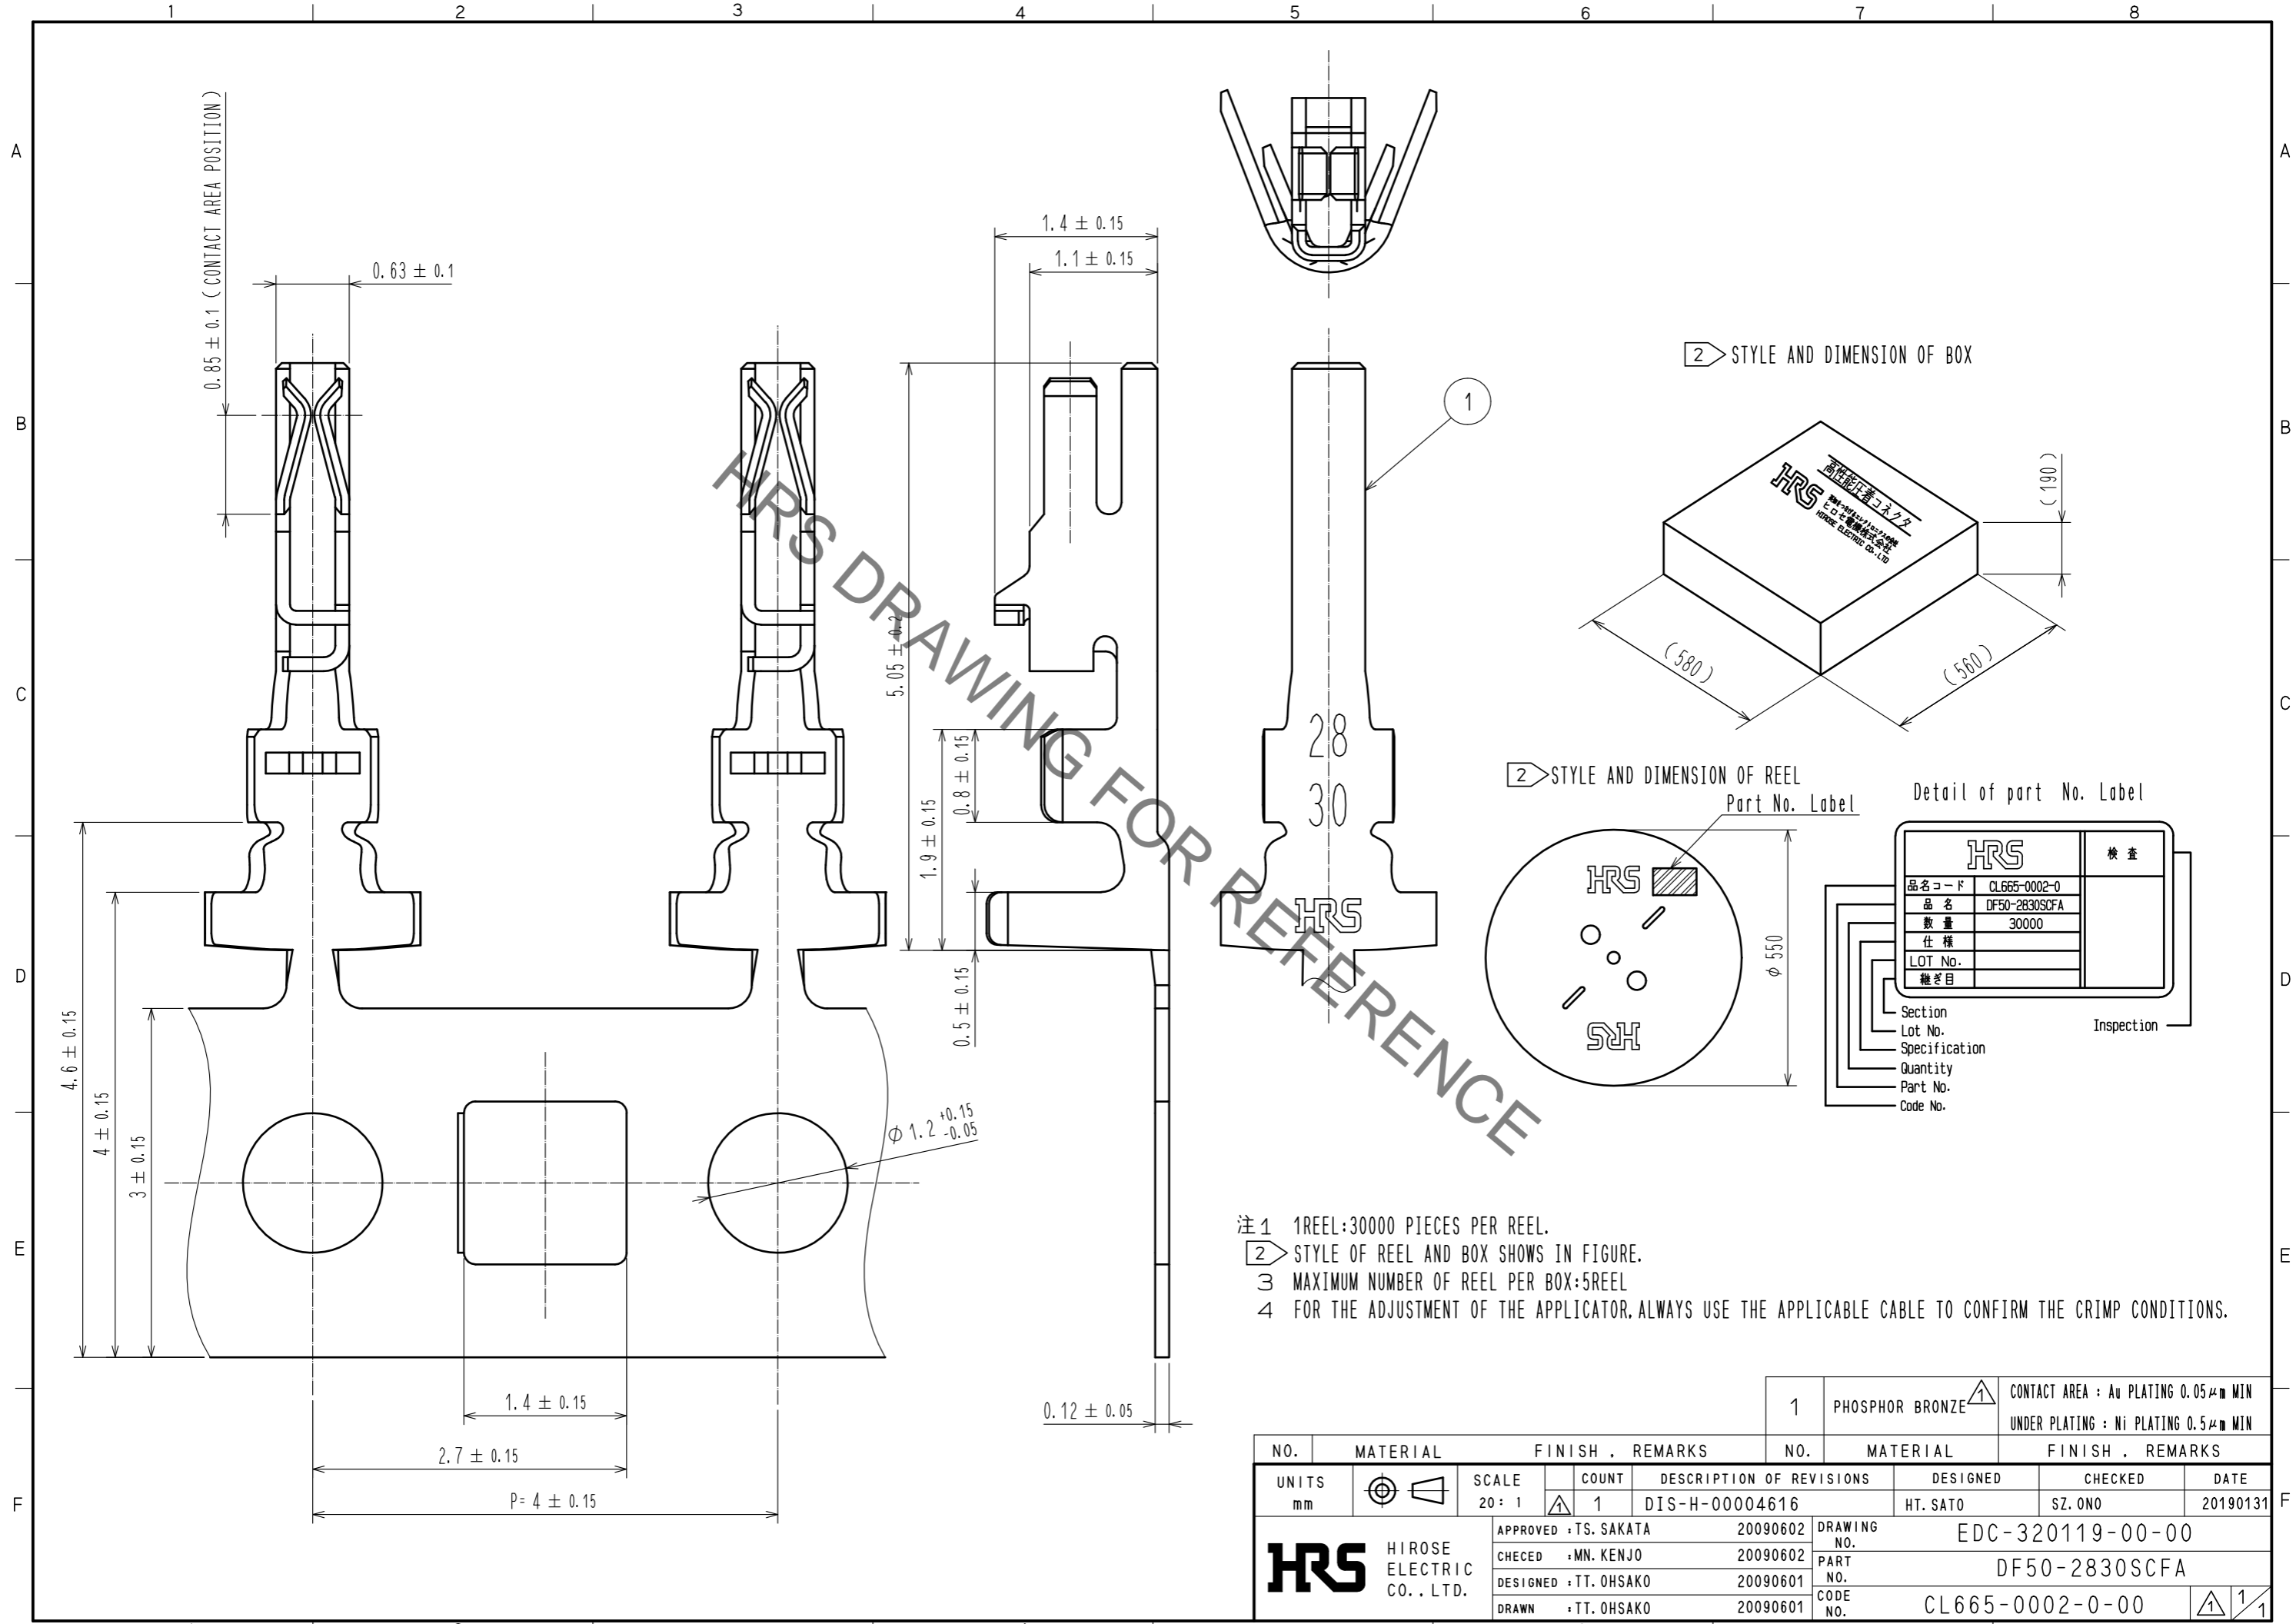

- 注1 1REEL:30000 PIECES PER REEL.
 注2 STYLE OF REEL AND BOX SHOWS IN FIGURE.
 注3 MAXIMUM NUMBER OF REEL PER BOX:5REEL
 注4 FOR THE ADJUSTMENT OF THE APPLICATOR, ALWAYS USE THE APPLICABLE CABLE TO CONFIRM THE CRIMP CONDITIONS.

NO.		MATERIAL		FINISH . REMARKS		NO.		MATERIAL		FINISH . REMARKS	
		1		PHOSPHOR BRONZE Δ				CONTACT AREA : Au PLATING 0.05 μ m MIN		UNDER PLATING : Ni PLATING 0.5 μ m MIN	
UNITS	\odot \triangleleft	SCALE	COUNT	DESCRIPTION OF REVISIONS			DESIGNED	CHECKED	DATE		
mm		20 : 1	1	DIS-H-00004616			HT. SATO	SZ. ONO	20190131		
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : TS. SAKATA	20090602	DRAWING NO.		EDC-320119-00-00					
		CHECED : MN. KENJO	20090602	PART NO.		DF50-2830SCFA					
		DESIGNED : TT. OHSAKO	20090601	CODE NO.		CL665-0002-0-00					
		DRAWN : TT. OHSAKO	20090601	NO.		1/1					